

MONBAT Premium ASIA K245J3X0_1 45 Ah

According to EN 50342 / JIS D 5301



Premium

SEALED MAINTENANCE FREE



Electrical specification

| | |
|---------------------------------|--------------------|
| Voltage: | 12V |
| Capacity C²⁰: | 45 Ah |
| Cold cranking current: | 330 A [EN] |
| Cold cranking current: | 200 A [DIN] |

Mechanical specification

| | |
|--|------------------------|
| Dimensional group: | NS40 |
| ETN reference: | 545 090 033 SMF |
| DIN reference: | - |
| Dimensions^A in mm (LxWxH): | 197x128x220 |
| Cell Layout: | 0 |
| Terminal Type: | 3 |

Container

| | | |
|-------------|-------------------------|----------------------|
| Case | Material | Polypropylene |
| | Bottom hold-down | B1 |
| | Colour | Grey |

| | | |
|------------|---------------------|----------------------|
| Lid | Material | Polypropylene |
| | Cover design | SMF |
| | Colour | Grey |

| | | |
|------------------|-----------------|----------------------|
| Vent caps | Material | Polypropylene |
| | Type | SMF |
| | Colour | Grey |

| | | |
|----------------|-----------------|----------------------|
| Handles | Material | Polypropylene |
| | Position | Top - on lid |
| | Colour | Grey |


Battery classification as per EN 50342-6

| | | | |
|--------------------------|-------------------------|-----------------------------|------------------------|
| Water consumption | Charge retention | Vibration resistance | Endurance Level |
| W4 | C2 | V2 | E2 |

Weight^B

| | |
|------------------------------------|--------------|
| Battery weight in kg: | 7.40 |
| Acid weight in kg: | 2.90 |
| Total battery weight in kg: | 10.30 |

Layout

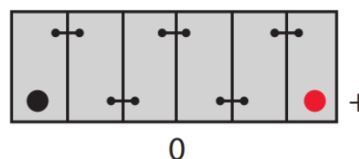

Hold-down



Separator

| | |
|-------------|-----------|
| Type | PE |
|-------------|-----------|

A. Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
B. Weight may vary ±5%.