


# MODEL: 3-EVF-210(GEL)



## Plane Chart:

Unit:(mm) Terminal type:(T3)

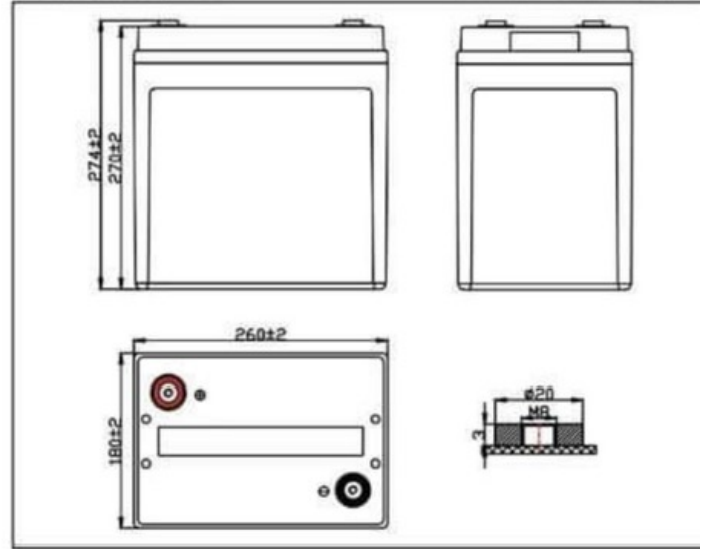


## Parameter Chart:

Volts		6V	
Capacity(25°C)	3 hours rate (70A)	210Ah	
	10 hours rate (26A)	260Ah	
Capacity Affected By Temperature	40°C	102%	
	25°C	100%	
	0°C	85%	
	-15°C	70%	
Residual Capacity (25°C)	Capacity After 3 Months Storage	90%	
	Capacity After 6 Months Storage	80%	
	Capacity After 12 Months Storage	60%	
Design cycle service life		4 years	
Charge (Constant Voltage)	Cycle (25°C)	Initial Charging Current Less Than 63A Voltage 7.25~7.45V	
	Float (25°C)	Charge Voltage 6.8~6.9V	
Weight (Approx)		36Kg	

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.

## Performance curve

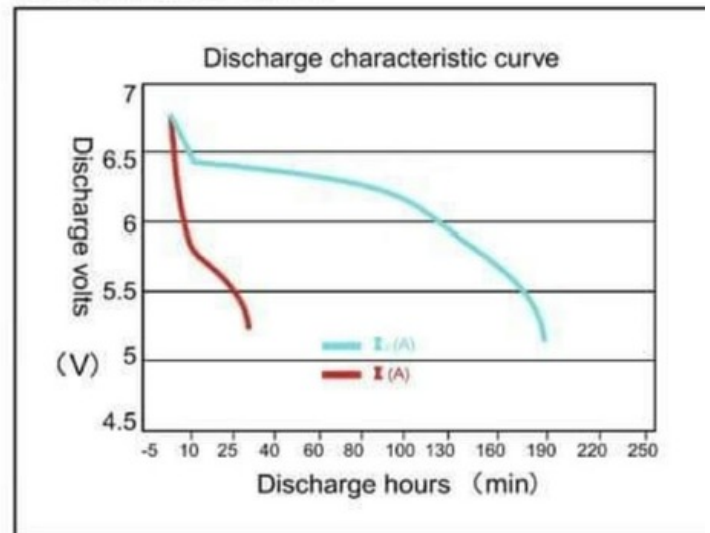

## Cycle service life in relation to the depth of discharge

