


Specification

Nominal Voltage		12 V
Capacity (25°C)	10HR(10.8V)	65 Ah
	5HR(10.5V)	57Ah
	1HR(9.60V)	40.7Ah
Dimension	Length	350±2mm (13.78inch)
	Width	167±2mm (6.57inch)
	Height	179±2mm (7.05inch)
	Total Height	T5: 186±2mm (7.32inch) T9: 179±2mm (7.05inch)
Approx. Weight		20kgs (44.13lbs)±4%
Terminal type		T5/T9
Internal resistance (Fully charged, 25°C)		Approx. 6mΩ
Capacity affected by temperature (10HR)	40°C	102%
	25°C	100%
	0°C	85%
	-15°C	65%
Self-discharge (25°C)	3 month	Remaining Capacity: 91%
	6 month	Remaining Capacity: 82%
	12 month	Remaining Capacity: 65%
Nominal operating temperature		25°C±3°C(77°F±5°F)
Operating temperature range	Discharge	-15°C~50°C(5°F~122°F)
	Charge	-10°C~50°C(14°F~122°F)
	Storage	-20°C~50°C(-4°F~122°F)
Float charging voltage(25°C)		13.50 to 13.80V Temperature compensation: -18mV/°C
Cyclic charging voltage(25°C)		14.50 to 14.90V Temperature compensation: -30mV/°C
Maximum charging current		19.5A
Terminal material		Copper
Maximum discharge current		650A(5 sec.)
Designed floating life(20°C)		7~10 years

- ◆ Absorbent glass mat technology;
- ◆ Recognized by RoHS& CE;
- ◆ ABS container.



Dimensions

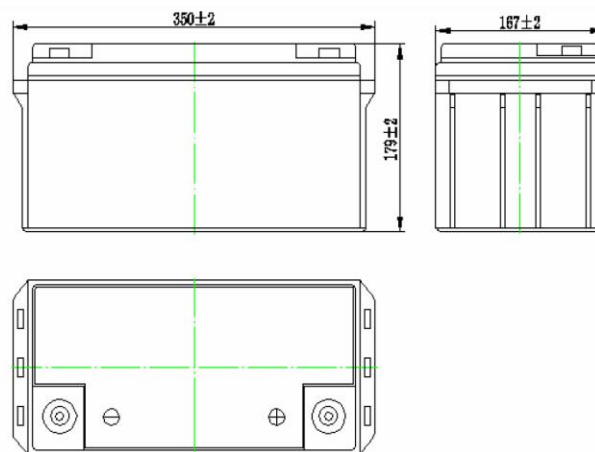

Constant Current Discharge (A m peres) at 25 °C (77°F)









F.V/TIME	10min	15min	30min	60min	2h	3h	4h	5h	8h	10h	20h
9.60V	139	108	65.7	40.7	23.8	16.6	13.6	11.6	7.96	6.62	3.47
9.90V	135	106	64.3	40.1	23.6	16.5	13.5	11.5	7.91	6.60	3.47
10.2V	129	102	62.4	39.1	23.4	16.4	13.4	11.5	7.85	6.58	3.46
10.5V	124	98.4	60.9	38.3	23.0	16.3	13.3	11.4	7.80	6.55	3.44
10.8V	117	93.2	58.6	37.1	22.5	15.8	12.9	11.0	7.57	6.50	3.41

Constant Power Discharge (W atts) at 25 °C (77°F)

F.V/TIME	10min	15min	30min	60min	2h	3h	4h	5h	8h	10h	20h
9.60V	1504	1189	737	464	275	195	160	137	94.5	79.0	41.7
9.90V	1459	1161	722	457	273	194	159	136	94.0	78.9	41.6
10.2V	1398	1118	700	445	271	192	158	135	93.3	78.6	41.5
10.5V	1338	1080	683	437	267	191	157	134	92.7	78.2	41.2
10.8V	1263	1023	658	423	260	185	152	130	89.9	77.6	41.0

Note: The above characteristics data can be obtained within three charge/discharge cycles.

Series -Long Life Standby AGM Characteristics Curve

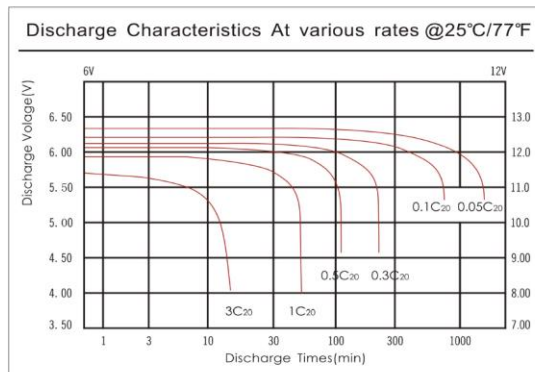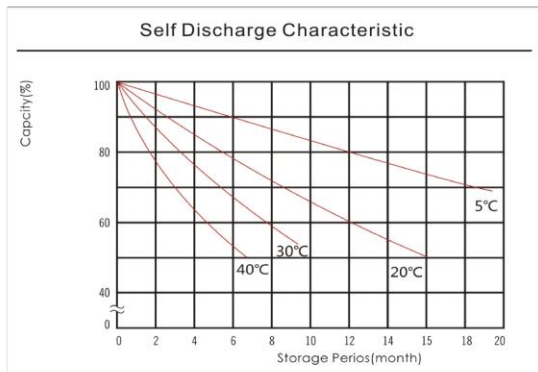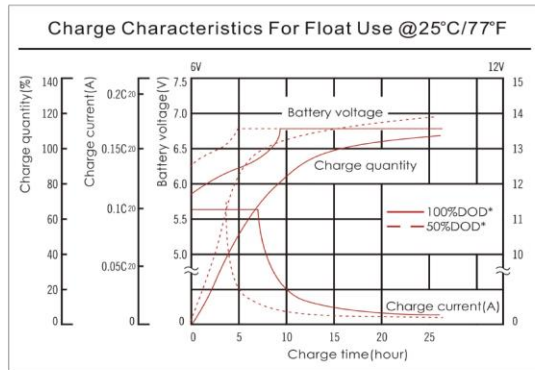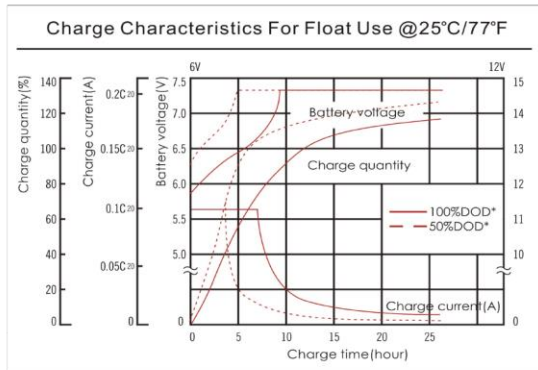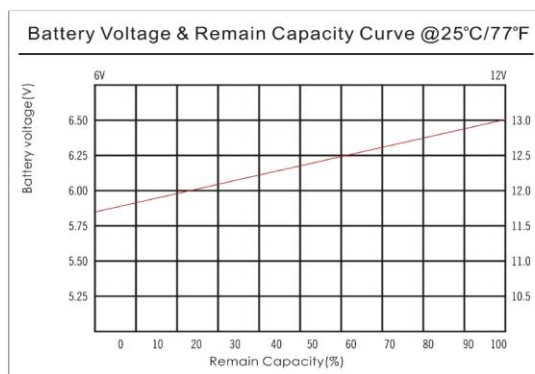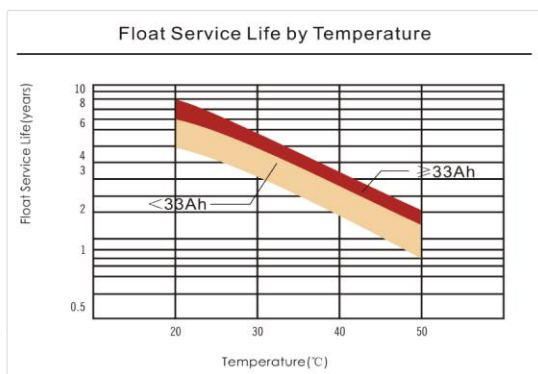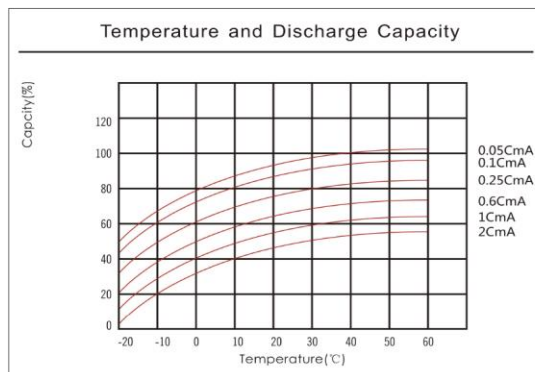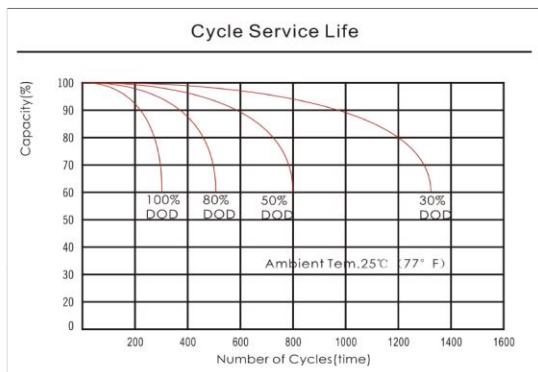

NHAT NANG JOINT STOCK COMPANY

Địa chỉ : Số 11 Đường 6D Phường Phước Bình Quận 9 Thành Phố Hồ Chí Minh

TELL : 02862809939

Web : <http://ac quy.asia>